

AMARR® CLASSICA® COLLECTION



*Refer to Exterior Color Options Chart

	CLASSICA Series 2000	CLASSICA Series 3000
Panel Designs	7 Designs	7 Designs & Flush
Carriage House	7 Designs	7 Designs & Flush
Door Thickness	2" (5.1cm)	2" (5.1cm)
Insulation	Polystyrene	Polyurethane
U-Factor	.32	.22
R-Value	6.64	13.35
Window Glass Options		
1/8" Tempered Double Strength	✓	✓
Optional Insulated Glass	✓	✓
Wind Load Available		
Warranty		
Paint Finish	Lifetime	Lifetime
Hardware	5 Years	Lifetime

DELVATION™ 300/400 & DELCRAFT 200



*Refer to Exterior Color Options Chart

	DV-300	DV-400	DC-200
Panel			
Short	✓	✓	✓
Long	✓	✓	✓
Flush	✓	✓	✓
Ribbed	✓	✓	✓
Carriage Designs	✓	✓	SQ, LQ, RE
Door Thickness	1 3/8"	2"	2"
Insulation	Polystyrene	Polystyrene	Polystyrene
U-Factor	.27	.23	.26
R-Value	6.48	9.05	9.05
Steel Thickness (actual)	27/27 ga	27/27 ga	24/27 ga
Wind Load Available	✓	✓	✓
Window Glass Options			
Single Strength	✓	✓	✓
Obscure	✓	✓	✓
Insulated Glass	✓	✓	✓
Wind Load Available			
Warranty			
Paint Finish	Lifetime	Lifetime	Lifetime
Hardware	3 Years	3 Years	5 Years

*Refer to Exterior Color Options Chart.

DELVATION™ 100/200 & PRESTIGE 1000/2000



*Refer to Exterior Color Options Chart

	DV-100 Series 1000	DV-200 Series 2000	PR-24 Series 1000	PR-24 Series 2000
Panel				
Short	✓	✓	✓	✓
Long	✓	✓	✓	✓
Flush	✓	✓	✓	✓
Carriage Design	✓	✓	SQ, LQ, RE	SQ, LQ, RE
Door Thickness	2"	2"	2"	2"
Insulation		1 1/2" Polystyrene		1 1/2" Polystyrene
Steel Thickness (actual)	25 ga	25 ga	24 ga	24 ga
Wind Load Available	✓	✓	✓	✓
Warranty				
Paint Finish	15 Years	25 Years	Lifetime	Lifetime
Hardware	1 Year	2 Years	3 Years	4 Years

VINTAGE 100 - 400



*Refer to Exterior Color Options Chart

	VIN-100	VIN-200	VIN-300	VIN-400
Carriage Designs				
	SQ, LQ, RE	SQ, LQ, RE	SQ, LQ, RE	SQ, LQ, RE
Door Thickness	2"	2"	1 3/8"	2"
Insulation		Polystyrene	Polystyrene	Polystyrene
U-Factor		.32	.27	.23
R-Value		6.84	6.48	9.05
Steel Thickness	25 ga	25 ga	27/27 ga	27/27 ga
Window Glass Options				
Single Strength	✓	✓	✓	✓
Obscure	✓	✓	✓	✓
Insulated Glass	✓	✓	✓	✓
Wind Load Available				
Warranty				
Paint Finish	15 Years	25 Years	Lifetime	Lifetime
Hardware	1 Year	2 Years	3 Years	3 Years

DELVATION™ 500/600 & VINTAGE 500/600



*Refer to Exterior Color Options Chart

	DV-500	VIN-500	DV-600	VIN-600
Panel				
Short	TW		✓	
Long			✓	
Flush	TW		TW	
Bead Board		TW		
Long Bead Board				✓
Recessed				✓
Door Thickness	1 3/8"	1 3/8"	2"	2"
Insulation	Polyurethane	Polyurethane	Polyurethane	Polyurethane
Steel Thickness (actual)	27/27 ga	27/27 ga	27/27 ga	27/27 ga
Wind Load Available	✓	✓	✓	✓
Warranty				
Paint Finish	Lifetime	Lifetime	Lifetime	Lifetime
Hardware	5 Years	5 Years	5 Years	5 Years

COMMERCIAL DOORS 625-C/624-C/620-C



*624-C Brown available in Wood Grain embossment. *624-C Gray and Black available in Smooth embossment.

	625-C	624-C	620-C
Steel Thickness (actual)	25 ga	24 ga	20 ga
Insulation	Optional	Optional	Optional
Exterior Design	Ribbed	Ribbed	Ribbed
Section Texture	Wood Grain	Smooth	Smooth
Section Widths (maximum)	18" 2"	30" 2"	30" 2"
Section Heights	21" & 24"	21" & 24"	21" & 24"
Door Thickness	2"	2"	2"
Overall Door Height (maximum)	14' 1"	20' 1"	20' 1"
Wind Load Available	16' 2" Maximum Width	20' 2" Maximum Width	20' 2" Maximum Width
Exterior Color	White	White, Gray, Brown, Black	White



WIND LOAD APPROVED DOORS AVAILABLE



RECYCLED STEEL

MODEL DTC 2500/2520/1350



	DTC-2500	DTC-2520	DTC-1350
Steel Thickness	27/27 ga	20/27 ga	27/27 ga
U-Factor	0.19	0.19	0.21
R-Value	19.4	19.4	14.5
Section Widths (maximum)	32' 2"	32' 2"	18' 2"
Section Heights	21" & 24"	21" & 24"	21" & 24"
Door Thickness	Heavy-Duty 2"	Extra Heavy-Duty 2"	Medium-Duty 1-3/8"
Overall Door Height (maximum)	20' 1"	20' 1"	14' 1"
Wind Load Available	16' 2" Maximum Width	16' 2" Maximum Width	16' 2" Maximum Width
Exterior Color	White, Sandtone, Gray, Brown	White	White, Sandtone, Gray, Brown

COMMERCIAL DELCRAFT 1380/2027/2000



	CDC-1380	CDC-2027	CDC-2000
Steel Thickness (actual)	27/27 ga	27/27 ga	24/27 ga
U-Factor	0.26	0.25	0.25
R-Value	6.7	9.4	9.4
Baked-On Paint Finish (0.3 mil primer / 0.7 mil top coat)	✓	✓	✓
Section Widths (maximum)	18' 2"	24' 2"	24' 2"
Section Heights	18", 21" & 24"	21" & 24"	21" & 24"
Door Thickness	1 3/8"	2"	2"
Overall Door Height (maximum)	14' 1"	20' 1"	20' 1"
Exterior Color	White, Almond, Wicker Tan, Sandtone	White, Sandtone, Gray, Brown	White, Sandtone, Gray, Brown
Wind Load Available	16' 2" Maximum Width	16' 2" Maximum Width	16' 2" Maximum Width
Exterior Embossment	Woodgrain Flush	Stucco with Pencil Groove	Stucco with Pencil Groove

SPECIFICATIONS AND WARRANTY

Consult your Delden Dealer for additional literature and specific warranty information.



"Experience the Quality"

Service, Quality & Efficiency Since 1964



Selecting Your Garage Door System



Delden Decorative Windows

Classica

TOP SECTIONS/DECORATIVE GLASS

JARDIN



TRELLIS



TOP SECTIONS/TRIM INSERTS

NILE



DANUBE



RHINE



THAMES



MADEIRA



SEINE




Estate Glass™

SHORT PANEL

Tempered obscure glass with baked-on ceramic designs.

VICTORIAN



HEARTLAND



MISSION



JARDIN



TRELLIS




LONG PANEL

VICTORIAN




HEARTLAND



MISSION



JARDIN



TRELLIS



KANSAS CITY, MISSOURI



"Experience the Quality"
www.deldenmfg.com

Design Trim Inserts

SHORT PANEL

CLEAR



STOCKTON



STOCKFORD



STOCKBRIDGE



ASHTON



MADISON



CATHEDRAL



CASCADE

Corner Feature



WATERTON



SHERWOOD



305 SUNRISE



405 SUNRISE (Short Panel)



405-10 SUNRISE (Short Panel)



LONG PANEL



GLASS OPTIONS

CLEAR



OBSCURE




FROST



DARK TINT



CUSTOM WINDOW PLACEMENT




The Choice is yours.

Add visual interest to your contemporary, mid-century modern or transitional home. With Custom Window Options you decide the number and location of windows to create the door design you want. Visit deldenmfg.com for design inspirations.

	Classica 2000	Classica 3000	Vintage 100	Vintage 200	Vintage 300	Vintage 400	Vintage 500	Vintage 600	PR-24 1000	PR-24 2000	DC 200	Delvation 100	Delvation 200	Delvation 300	Delvation 400	Delvation 500	Delvation 600	
Panel Designs																		
Short (S)										✓	✓	✓	✓	✓	✓	✓	✓	✓
Long (L)										✓	✓	✓	✓	✓	✓	✓	✓	✓
Flush (F)		✓ ³								✓	✓	✓	✓	✓	✓	✓	✓	TW
Ribbed (R)											✓			✓	✓			
Bead Board (SQ)			✓	✓	✓	✓	✓	✓	✓	✓	✓							
Long Bead Board (LQ)			✓	✓	✓	✓	✓	✓	✓	✓	✓							
Recessed (RE)			✓	✓	✓	✓	✓	✓	✓	✓	✓							
Carriage House	7 Designs	7 Designs	3 Designs	3 Designs	3 Designs	3 Designs	1 Design	3 Designs	3 Designs	3 Designs	3 Designs							
Construction Layers																		
Steel			✓							✓			✓					
Steel + Insulation	✓			✓						✓			✓					
Steel + Insulation + Steel		✓		✓	✓	✓	✓	✓			✓			✓	✓	✓	✓	✓
Door Thickness	2"	2"	2"	2"	1 3/8"	2"	1 3/8"	2"	2"	2"	2"	2"	2"	1 3/8"	2"	1 3/8"	2"	2"
Insulation	Polystyrene	Polyurethane		Polystyrene	Polystyrene	Polystyrene	Polyurethane	Polyurethane		Polystyrene	Polystyrene		Polystyrene	Polystyrene	Polystyrene	Polyurethane	Polyurethane	
U-Factor	.32	.22		.32	.27	.23	.24	.19*		.43	.26		.32	.27	.23	.24	.19*	
R-Value	6.64	13.35		6.84	6.48	9.05	14.46	19.40/13.35		6.84	9.05		6.84	6.48	9.05	14.46	19.40/13.35	
Steel Thickness (Actual)	24 ga	25/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	27/27 ga	27/27 ga	24 ga	24 ga	24/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	27/27 ga	27/27 ga	27/27 ga
Shadow Line 21" Sections								SO	✓				S, L	S, L	L	L	S	S, L
Door Widths	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	8', 9', 16'	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	All Standard Sizes	8', 9', 16'	All Standard Sizes
End Stiles																		
Galvanized	✓		✓	✓								✓	✓					
Painted		✓			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓
Window Glass Options																		
3/32" Single Strength			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
1/8" Tempered Double	✓	✓																
Insulated Glass		Clear, Frost, Dark Tint			Clear, Frost, Dark Tint	Clear, Frost, Dark Tint	Clear, Frost, Dark Tint	Clear, Frost, Dark Tint			Clear, Frost, Dark Tint			Clear, Frost, Dark Tint	Clear, Frost, Dark Tint	Clear, Frost, Dark Tint	Clear, Frost, Dark Tint	Clear, Frost, Dark Tint
Custom Window Placement		Full View Flush [†]									S, L, F, R			✓	✓	✓	✓	✓
Decorative Hardware Options	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
Exterior Color Options																		
True White (TW)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Almond (AL)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wicker Tan (WK)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Sandtone (ST)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Terratone (TT)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Charcoal Gray (EF)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dark Brown (DN)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black (BL) †‡	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Two-Tone †‡	✓	✓																
Color Zone †	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Woodgrain																		
Golden Oak (OK) †	✓	✓																
Walnut (NT) †	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Mahogany (MY) †	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Weathered Gray (WZ) †	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wind Load Available ¹	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Warranty²																		
Paint Finish	Lifetime	Lifetime	15 Years	25 Years	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime
Hardware	5 Years	Lifetime	1 Year	2 Years	3 Years	3 Years	5 Years	5 Years	3 Years	4 Years	5 Years	1 Year	2 Years	3 Years	3 Years	5 Years	5 Years	5 Years

* Applicable only to True White Short, True White Flush and True White Bead Board. † A Black garage door is not recommended for houses facing southwest and subject to extreme sun/heat exposure. ‡ Price upcharge applies. (1) It is your responsibility to make sure your garage door meets local building codes. (2) For complete warranty details, visit deldenmfg.com or contact your local Delden dealer. (3) Classica Flush not available in Woodgrain colors.

How to Measure Your Opening For Correct Door Sizing

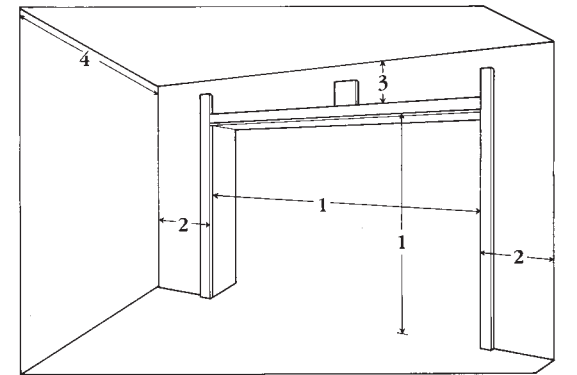

1. Measure the openings height and width, of your existing garage door (feet and inches). It is probable that the door is commonly-sized; even if it's not, Delden can provide custom-sized doors.
2. Measure available "sideroom": 3 1/4" is required on each side of the door opening to properly install the vertical track members.
3. Measure the area between the top of the door's opening to the ceiling; this measurement, called "head room," determines whether or not a garage door has adequate space to "store" in the "up" position. At least 4" is required, and 12" is the minimum amount of space necessary for a standard residential installation.
4. Measure the distance between back and front walls of the garage. Door height plus 18" is required to correctly raise a garage door. If obstructions exist within the travel path of a door moving upward, relocation of the obstructions will be necessary to allow the door to properly rest in the "up" position.

Special modifications may be available to accommodate odd dimensions; take great care in making these measurements so your needs can be accurately determined.

DISTRIBUTED BY

DELLEN MANUFACTURING COMPANY, INC.
KANSAS CITY, MISSOURI



"Experience the Quality"

www.deldenmfg.com
©2023 Rev 10/20